

12/9/14



<http://www.slidewright.com/ski-and-snowboard/bindings/>

Thanks to Sources:  
Wildsnow.com  
Pliny Equipment

← Ski Tip  
USE ONLY AT  
YOUR OWN RISK

↑ EQUAL DISTANCE TO  
SKI EDGE TO FIND CENTER  
↓

BOOT TOE (+/-)

TOE PIN LINE

20mm


40mm

24mm

21mm

45mm

G3 ION-Toe-2014




TOE HEEL


(OPTIONAL CUT OUT @ MEASURED BSL)

See: <https://www.facebook.com/video.php?v=585617088204778>

1/2 BSL LESS PIN TO BOOT TOE

240mm
250mm
260mm
270mm
280mm
290mm
300mm
310mm
320mm
330mm
340mm
350mm
360mm

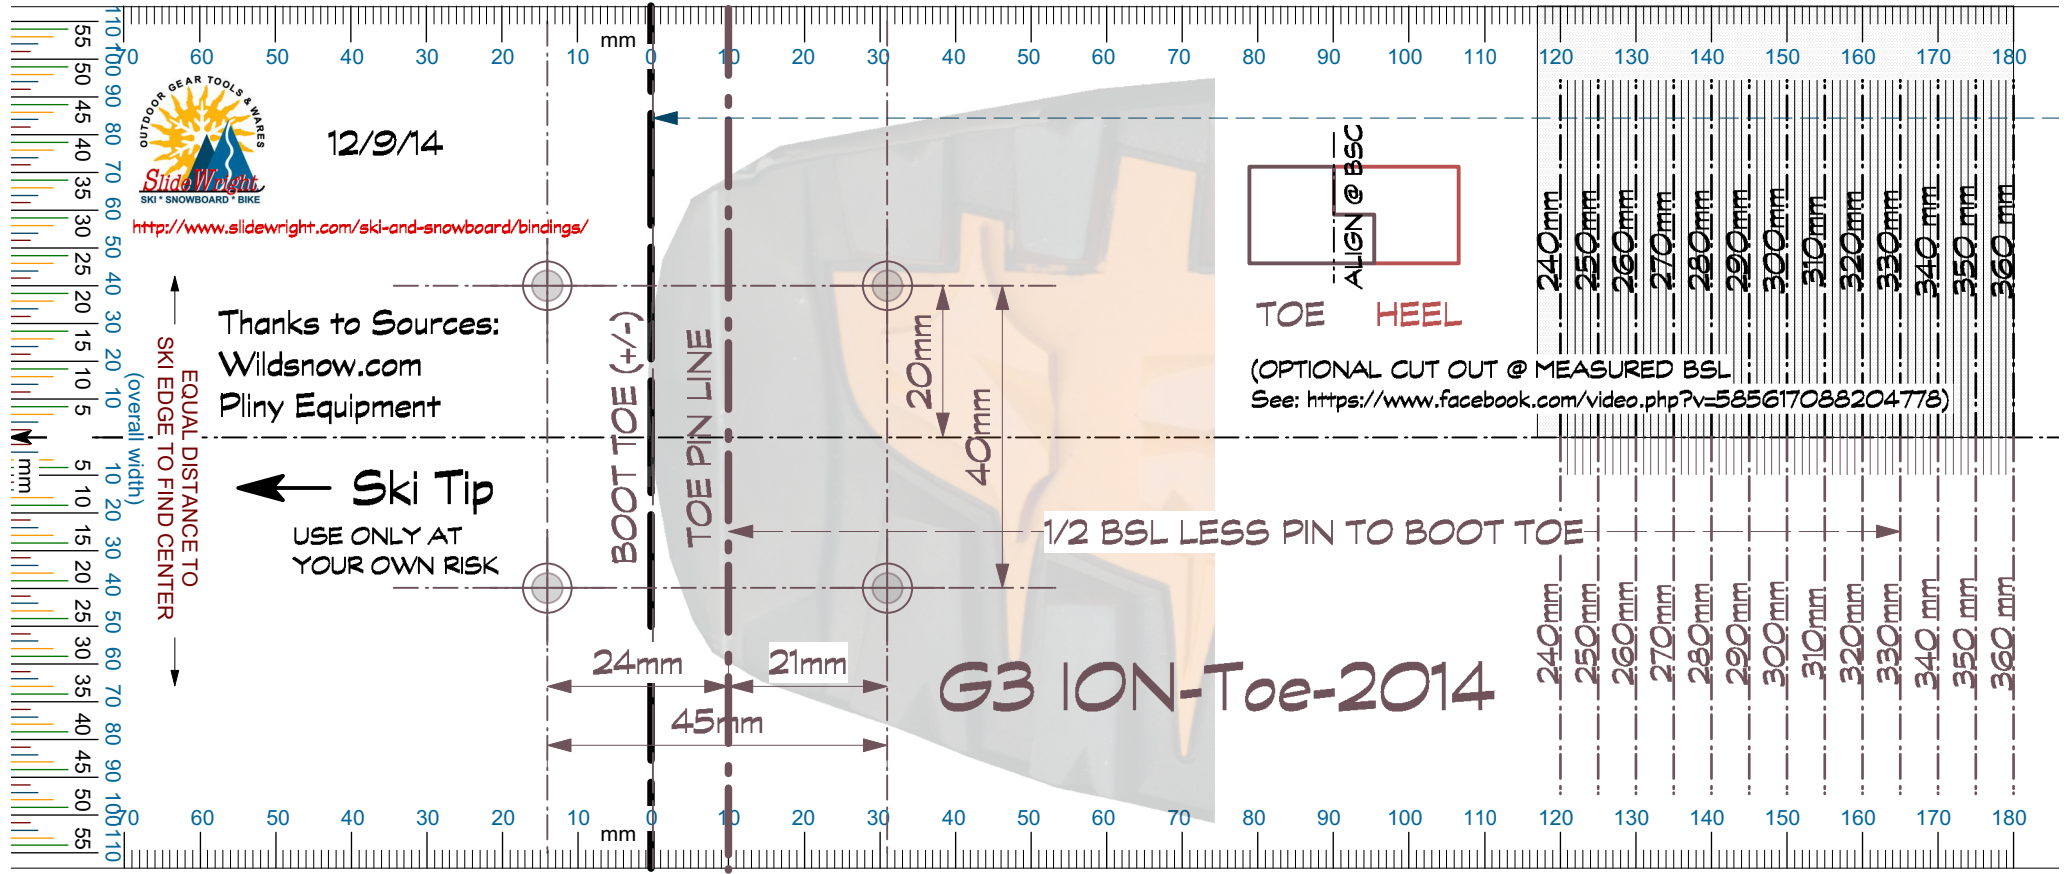

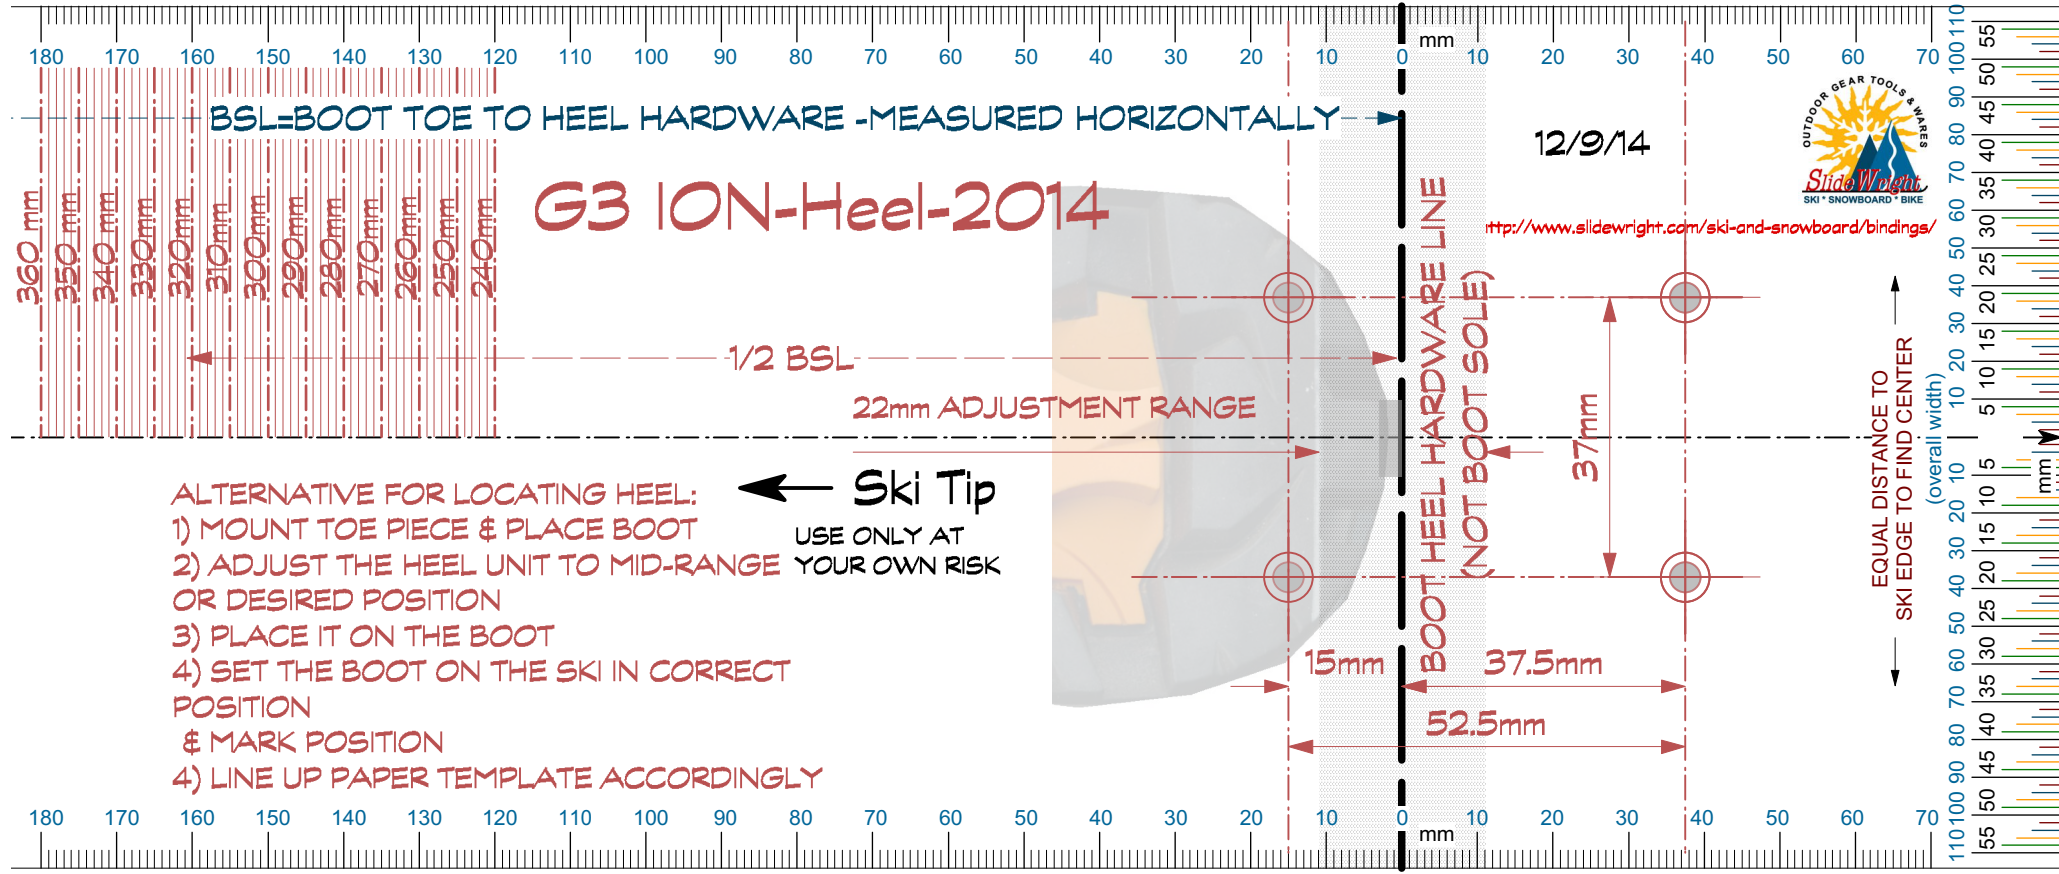

BSL=BOOT TOE TO HEEL HARDWARE -MEASURED HORIZONTALLY

12/9/14



G3 ION-Heel-2014

<http://www.slidewright.com/ski-and-snowboard/bindings/>

- 360 mm
- 350 mm
- 340 mm
- 330 mm
- 320 mm
- 310 mm
- 300 mm
- 290 mm
- 280 mm
- 270 mm
- 260 mm
- 250 mm
- 240 mm

1/2 BSL

22mm ADJUSTMENT RANGE

BOOT HEEL HARDWARE LINE  
(NOT BOOT SOLE)

37mm

EQUAL DISTANCE TO  
SKI EDGE TO FIND CENTER  
(overall width)

- ← Ski Tip
- USE ONLY AT YOUR OWN RISK
- 1) MOUNT TOE PIECE & PLACE BOOT
  - 2) ADJUST THE HEEL UNIT TO MID-RANGE OR DESIRED POSITION
  - 3) PLACE IT ON THE BOOT
  - 4) SET THE BOOT ON THE SKI IN CORRECT POSITION & MARK POSITION
  - 4) LINE UP PAPER TEMPLATE ACCORDINGLY

15mm

37.5mm

52.5mm